

# Switching Technology

## S38.165

Pertti Raatikainen  
VTT Information Technology  
pertti.raatikainen@vtt.fi

## General

- **Lecturer:**  
Pertti Raatikainen, research professor /VTT  
email: pertti.raatikainen@vtt.fi
- **Exercises:**  
Kari Seppänen, snr. research scientist /VTT  
email: kari.seppänen@vtt.fi
- **Information:** <http://www.netlab.hut.fi/opetus/s38165>

## Goals of the course

- Understand what switching is about
- Understand the basic structure and functions of a switching system
- Understand the role of a switching system in a transport network
- Understand how a switching system works
- Understand technology related to switching
- Understand how conventional circuit switching is related to packet switching

## Course outline

- Introduction to switching
  - switching in general
  - switching modes
  - transport and switching
- Switch fabrics
  - basics of fabric architectures
  - fabric structures
  - path search, self-routing and sorting

## Course outline

- **Switch implementations**
  - PDH switches
  - ATM switches
  - routers
- **Optical switching**
  - basics of WDM technology
  - components for optical switching
  - optical switching concepts

## Course requirements

- **Preliminary information**
  - S-38.188 Tietoliikenneverkot or  
S-72.423 Telecommunication Systems  
(or a corresponding course)
- **13 lectures (á 3 hours) and 7 exercises (á 2 hours)**
- **Calculus exercises**
- **Grating**
  - Calculus 0 to 6 bonus points – valid in exams in 2005
  - Examination, max 30 points

## Course material

- Lecture notes
- *Understanding Telecommunications 1*, Ericsson & Telia, Studentlitteratur, 2001, ISBN 91-44-00212-2, Chapters 2-4.
- J. Hui: *Switching and traffic theory for integrated broadband networks*, Kluwer Academic Publ., 1990, ISBN 0-7923-9061-X, Chapters 1 - 6.
- H. J. Chao, C. H. Lam and E. Oki: *Broadband Packet Switching technologies – A Practical Guide to ATM Switches and IP routers*, John Wiley & Sons, 2001, ISBN 0-471-00454-5.
- T.E. Stern and K. Bala: *Multiwavelength Optical Networks: A Layered Approach*, Addison-Wesley, 1999, ISBN 0-201-30967-X.

## Additional reading

- A. Pattavina: *Switching Theory - Architecture and Performance in Broadband ATM Networks*, John Wiley & Sons (Chichester), 1998, ISBN 0-471-96338-0, Chapters 2 - 4.
- R. Ramaswami and K. Sivarajan, *Optical Networks, A Practical Perspective*, Morgan Kaufman Publ., 2nd Ed., 2002, ISBN 1-55860-655-6.

## Schedule

| Day   | L/E | Topic                                    |
|-------|-----|--|
| 18.1. | L   | Introduction to switching                |
| 25.1. | L   | Transmission techniques and multiplexing |
| 27.1. | E   | Exercise 1                               |
| 1.2.  | L   | Basic concepts of switch fabrics         |
| 8.2.  | L   | Multistage fabric architectures 1        |
| 10.2. | E   | Exercise 2                               |
| 15.2. | L   | Multistage fabric architectures 2        |
| 22.2. | L   | Self- routing and sorting networks       |
| 24.2. | E   | Exercise 3                               |
| 1.3.  | L   | Switch fabric implementations            |
| 8.3.  | L   | PDH switches                             |
| 10.3. | E   | Exercise 4                               |
| 15.3. | L   | ATM switches                             |
| 17.3. | E   | Exercise 5                               |
| 22.3. | L   | Routers                                  |
| 5.4.  | L   | Introduction to optical networks         |
| 7.4.  | E   | Exercise 6                               |
| 12.4. | L   | Optical network architectures            |
| 19.4. | L   | Optical switches                         |
| 21.4. | E   | Exercise 7                               |

## Introduction to switching

**Switching Technology S38.165**  
<http://www.netlab.hut.fi/opetus/s38165>

## Introduction to switching

- Switching in general
- Switching modes
- Transport and switching

## Switching in general

### ITU-T specification for switching:

**“The establishing, on-demand, of an individual connection from a desired inlet to a desired outlet within a set of inlets and outlets for as long as is required for the transfer of information.”**

inlet/outlet = a line or a channel


## Switching in general (cont.)

- Switching implies directing of information flows in communications networks based on known rules
- Switching takes place in specialized network nodes
- Data switched on bit, octet, frame or packet level
- Size of a switched data unit is variable or fixed


## Why switching ?

- Switches allow reduction in overall network cost by reducing number and/or cost of transmission links required to enable a given user population to communicate
- Limited number of physical connections implies need for sharing of transport resources, which means
  - better utilization of transport capacity
  - use of switching
- Switching systems are central components in communications networks

## Full connectivity between hosts

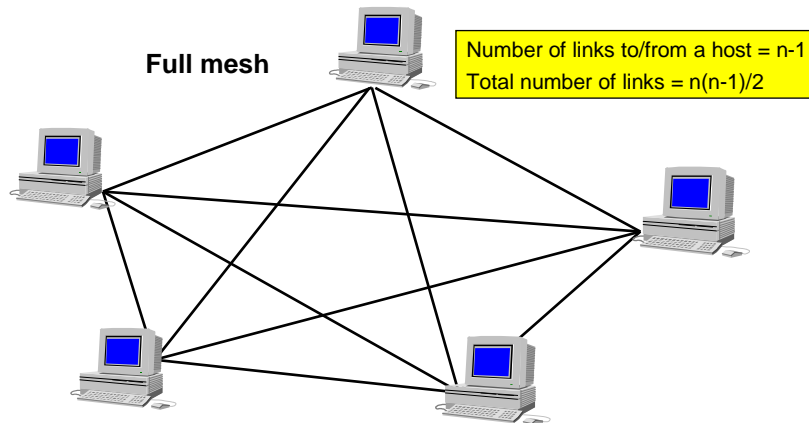


## Centralized switching

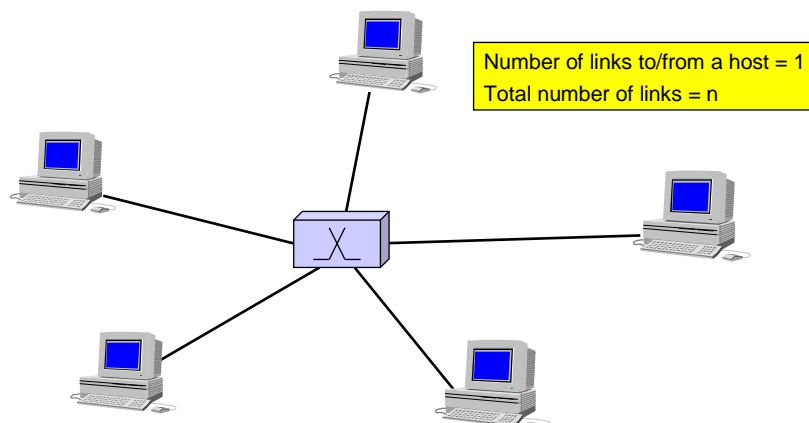





## Switching network to connect hosts

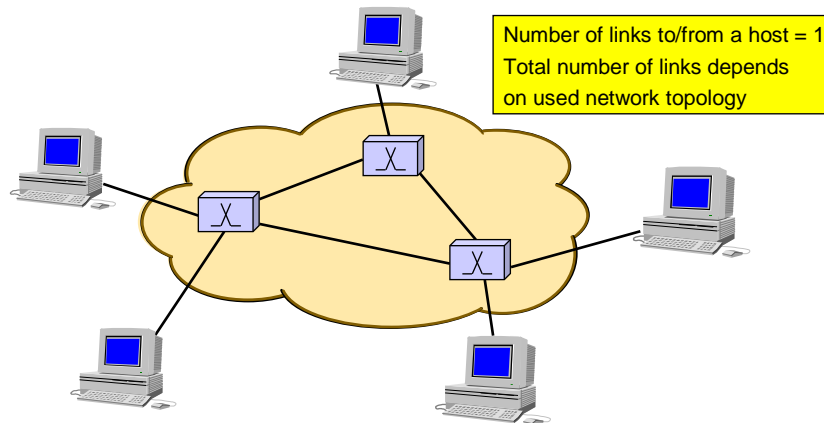

## Hierarchy of switching networks

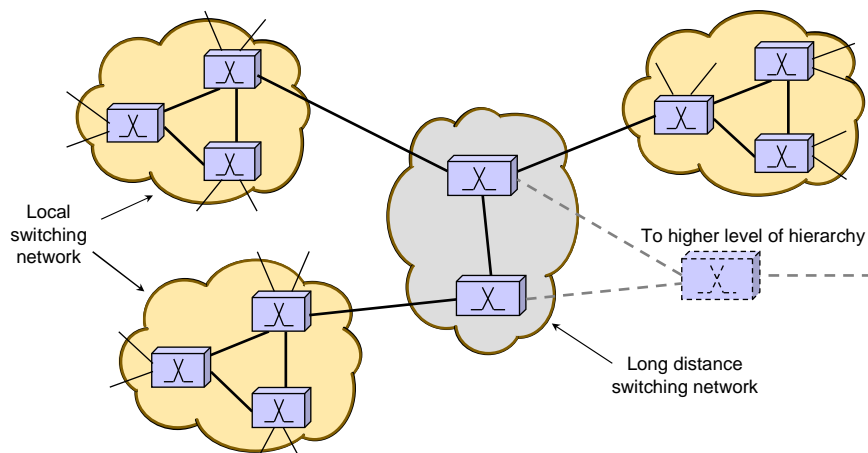


## Sharing of link capacity

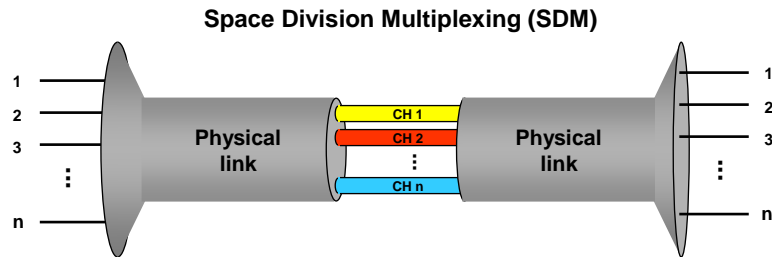


- Space to be divided:**
- physical cable or twisted pair
  - frequency
  - light wave

## Sharing of link capacity (cont.)

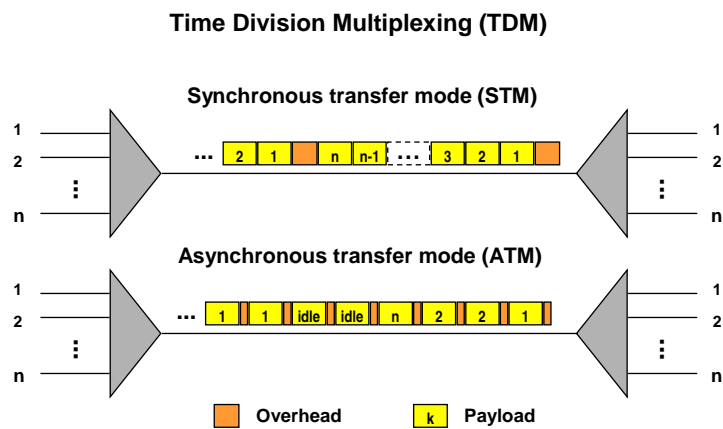


## Main building blocks of a switch

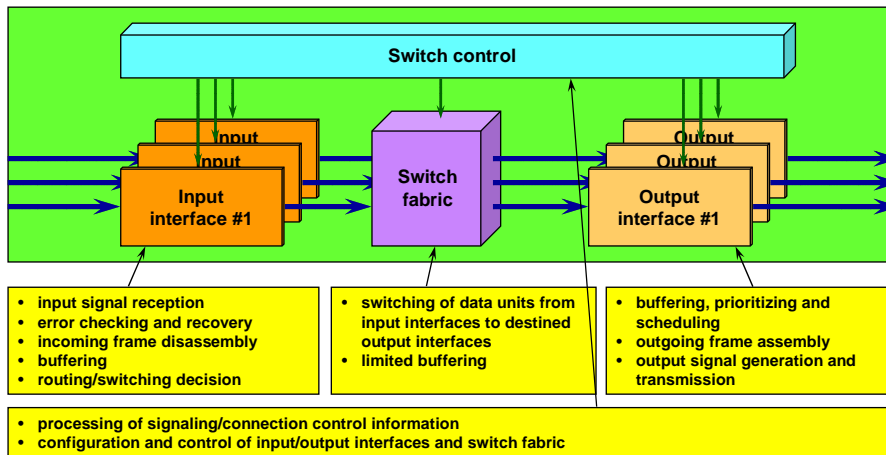

## Heterogeneity by switching

- Switching systems allow heterogeneity among terminals
  - terminals of different processing and transmission speeds supported
  - terminals may implement different sets of functionality
- and heterogeneity among transmission links by providing a variety of interface types
  - data rates can vary
  - different link layer framing applied
  - optical and electrical interfaces
  - variable line coding


## Heterogeneity by switching (cont.)

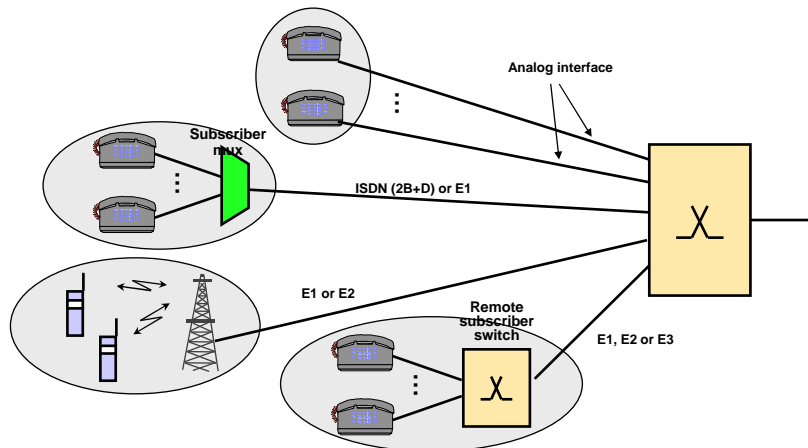

## Basic types of switching networks

- Statically switched networks
  - connections established for longer periods of time (typically for months or years)
  - management system used for connection manipulation
- Dynamically switched networks
  - connections established for short periods of time (typically from seconds to tens of minutes)
  - active signaling needed to manipulate connections
- Routing networks
  - no connections established - no signaling
  - each data unit routed individually through a network
  - routing decision made dynamically or statically

## Development of switching technologies

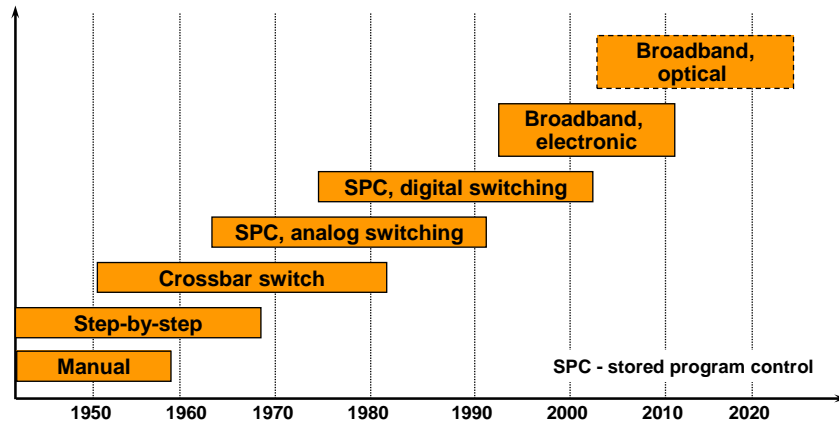

Source: *Understanding Telecommunications 1*, Ericsson & Telia, Studentlitteratur, 2001.


## Development of switching tech. (cont.)

- Manual systems
  - in the infancy of telephony, exchanges were built up with manually operated switching equipment (the first one in 1878 in New Haven, USA)
- Electromechanical systems
  - manual exchanges were replaced by automated electromechanical switching systems
  - a patent for automated telephone exchange in 1889 (Almon B. Strowger)
  - step-by-step selector controlled directly by dial of a telephone set
  - developed later in the direction of register-controlled system in which number information is first received and analyzed in a register – the register is used to select alternative switching paths (e.g. 500 line selector in 1923 and crossbar system in 1937)
  - more efficient routing of traffic through transmission network
  - increased traffic capacity at lower cost

## Development of switching tech. (cont.)

- Computer-controlled systems
  - FDM was developed round 1910, but implemented in 1950's (ca. 1000 channels transferred in a coaxial cable)
  - PCM based digital multiplexing introduced in 1970's – transmission quality improved – costs reduced further when digital group switches were combined with digital transmission systems
  - computer control became necessary - the first computer controlled exchange put into service in 1960 (in USA)
  - strong growth of data traffic resulted in development of separate data networks and switches – advent of packet switching (sorting, routing and buffering)
  - N-ISDN network combined telephone exchange and packet data switches
  - ATM based cell switching formed basis for B-ISDN
  - next step is to use optical switching with electronic switch control – all optical switching can be seen in the horizon

## Roadmap of Finnish networking technologies

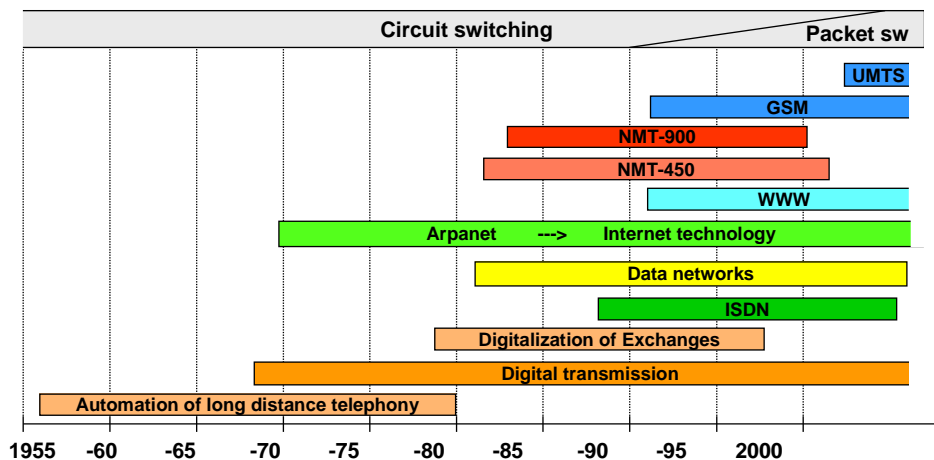

## Challenges of modern switching

- Support of different traffic profiles
  - constant and variable bit rates, bursty traffic, etc.
- Simultaneous switching of highly different data rates
  - from kbits/s rates to Gbits/s rates
- Support of varying delay requirements
  - constant and variable delays
- Scalability
  - number of input/output links, link bit rates, etc.
- Reliability
- Cost
- Throughput


## Switching modes

**Switching Technology S38.165**  
<http://www.netlab.hut.fi/opetus/s38165>

## Narrowband network evolution

- Early telephone systems used analog technology - frequency division multiplexing (FDM) and space division switching (SDS)
- When digital technology evolved time division multiplexing (TDM) and time division switching (TDS) became possible
- Development of electronic components enabled integration of TDM and TDS => Integrated Digital Network (IDN)
- Different and segregated communications networks were developed
  - circuit switching for voice-only services
  - packet switching for (low-speed) data services
  - dedicated networks, e.g. for video and specialized data services

## Segregated transport

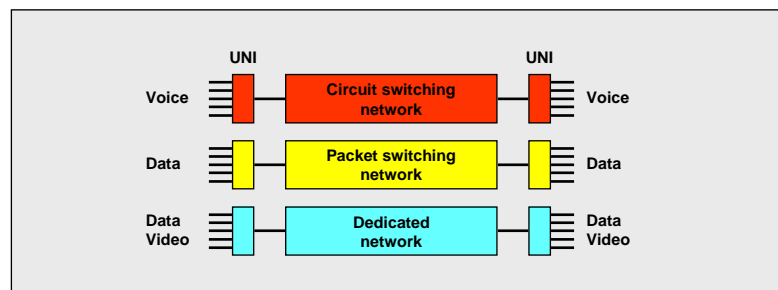




## Narrowband network evolution (cont.)

- Service integration became apparent to better utilize communications resources  
=> IDN developed to ISDN (Integrated Services Digital Network)
- ISDN offered
  - a unique user-network interface to support basic set of narrowband services
  - integrated transport and full digital access
  - inter-node signaling (based on packet switching)
  - packet and circuit switched end-to-end digital connections
  - three types of channels (B=64 kbit/s, D=16 kbit/s and H=nx64 kbit/s)
- Three types of long-distance interconnections
  - circuit switched, packet switched and signaling connections
- Specialized services (such as video) continued to be supported by separate dedicated networks


## Integrated transport

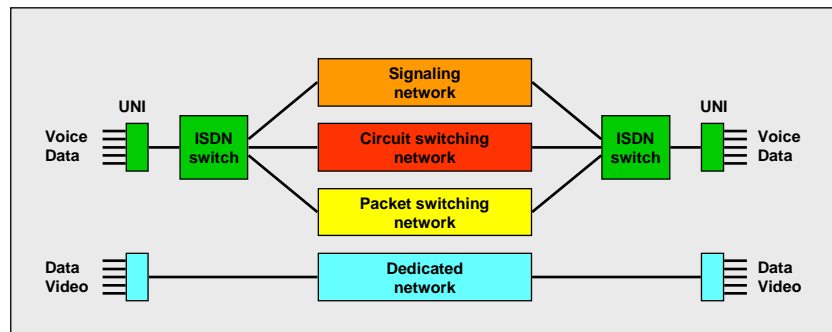

## Broadband network evolution

- Progress in optical technologies enabled huge transport capacities  
=> integration of transmission of all the different networks  
(NB and BB) became possible
- Switching nodes of different networks co-located to configure multifunctional switches
  - each type of traffic handled by its own switching module
- Multifunctional switches interconnected by broadband integrated transmission (BIT) systems terminated onto network-node interfaces (NNI)
- BIT accomplished with partially integrated access and segregated switching


## Narrowband-integrated access and broadband-integrated transmission

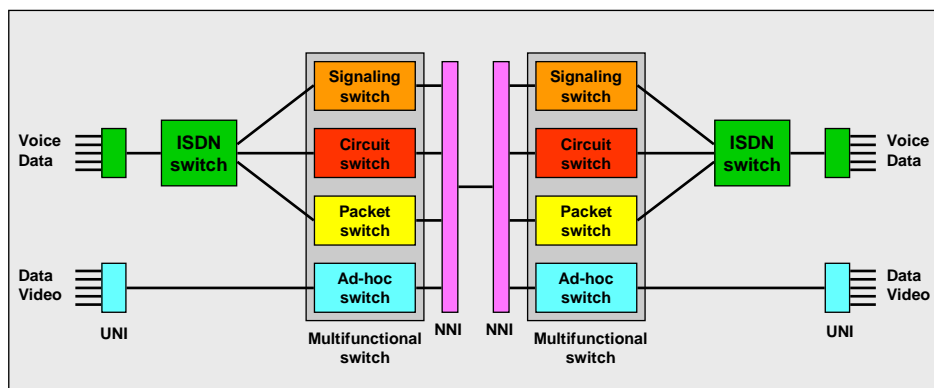


## Broadband network evolution (cont.)

- N-ISDN had some limitations:
  - low bit rate channels
  - no support for variable bit rates
  - no support for large bandwidth services
- Connection oriented packet switching scheme, i.e., ATM (Asynchronous Transfer Mode), was developed to overcome limitations of N-ISDN  
=> B-ISDN concept  
=> integrated broadband transport and switching (no more need for specialized switching modules or dedicated networks)

## Broadband integrated transport

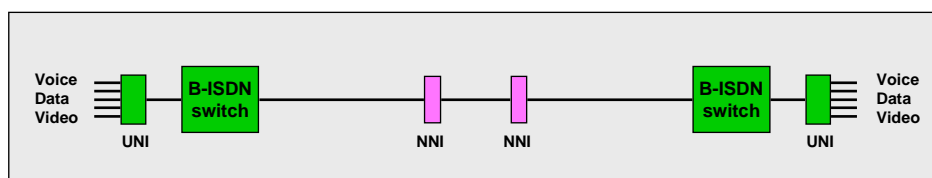

## OSI definitions for routing and switching

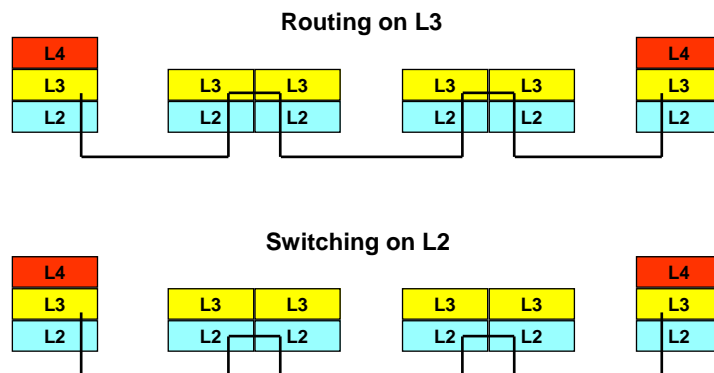


## Switching modes

- Circuit switching
- Cell and frame switching
- Packet switching
  - Routing
  - Layer 3 - 7 switching
  - Label switching


## Circuit switching

- End-to-end circuit established for a connection
- Signaling used to set-up, maintain and release circuits
- Circuit offers constant bit rate and constant transport delay
- Equal quality offered to all connections
- Transport capacity of a circuit cannot be shared
- Applied in conventional telecommunications networks (e.g. PDH/PCM and N-ISDN)



## Cell switching

- Virtual circuit (VC) established for a connection
- Data transported in fixed length frames (cells), which carry information needed for routing cells along established VCs
- Forwarding tables in network nodes

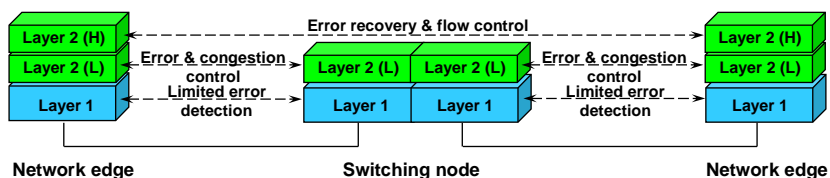


## Cell switching (cont.)

- Signaling used to set-up, maintain and release VCs as well as update forwarding tables
- VCs offer constant or variable bit rates and transport delay
- Transport capacity of links shared by a number of connections (statistical multiplexing)
- Different quality classes supported
- Applied, e.g. in ATM networks

## Frame switching

- Virtual circuits (VC) established usually for virtual LAN connections
- Data transported in variable length frames (e.g. Ethernet frames), which carry information needed for routing frames along established VCs
- Forwarding tables in network nodes

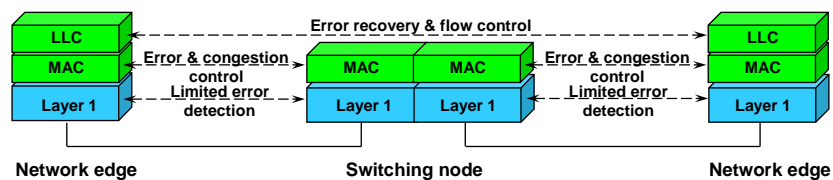


## Frame switching (cont.)

- VCs based, e.g., on 12-bit Ethernet VLAN IDs (Q-tag) or 48-bit MAC addresses
- Signaling used to set-up, maintain and release VCs as well as update forwarding tables
- VCs offer constant or variable bit rates and transport delay
- Transport capacity of links shared by a number of connections (statistical multiplexing)
- Different quality classes supported
- Applied, e.g. in offering virtual LAN services for business customers

## Packet switching

- No special transport path established for a connection
- Variable length data packets carry information used by network nodes in making forwarding decisions
- No signaling needed for connection setup

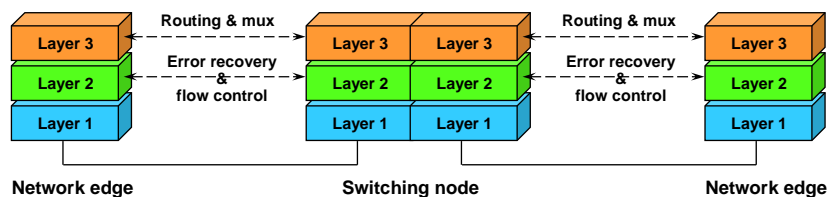

## Packet switching (cont.)

- Forwarding tables in network nodes are updated by routing protocols
- No guarantees for bit rate or transport delay
- Best effort service for all connections in conventional packet switched networks
- Transport capacity of links shared effectively
- Applied in IP (Internet Protocol) based networks


## Layer 3 - 7 switching

- L3-switching evolved from the need to speed up (IP based) packet routing
- L3-switching separates routing and forwarding
- A communication path is established based on the first packet associated with a flow of data and succeeding packets are switched along the path (i.e. software based routing combined with hardware based one)
- Notice: In wire-speed routing traditional routing is implemented in hardware to eliminate performance bottlenecks associated with software based routing (i.e., conventional routing reaches/surpasses L3-switching speeds)




## Layer 3 - 7 switching (cont.)

- In L4 - L7 switching, forwarding decisions are based not only on MAC address of L2 and destination/source address of L3, but also on application port number of L4 (TCP/UDP) and on information of layers above L4

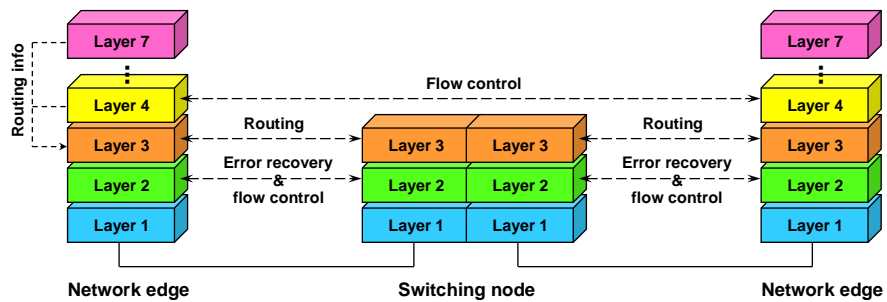

## Label switching

- Evolved from the need to speed up connectionless packet switching and utilize L2-switching in packet forwarding
- A label switched path (LSP) established for a connection
- Forwarding tables in network nodes

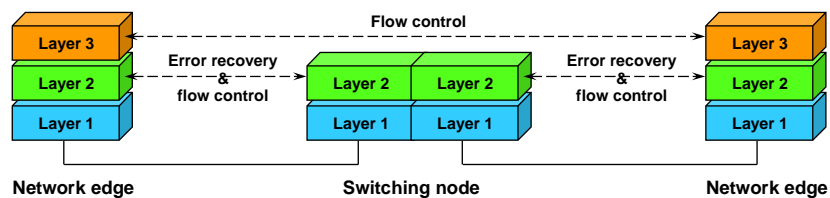

## Label switching (cont.)

- Signaling used to set-up, maintain and release LSPs
- A label is inserted in front of a L3 packet (behind L2 frame header)
- Packets forwarded along established LSPs by using labels in L2 frames
- Quality of service supported
- Applied, e.g. in ATM, Ethernet and PPP
- Generalized label switching scheme (GMPLS) extends MPLS to be applied also in optical networks, i.e., enables light waves to be used as LSPs

## Latest directions in switching

- The latest switching schemes developed to utilize Ethernet based transport
- Scalability of the basic Ethernet concept has been the major problem, i.e., 12-bit limitation of VLAN ID
- Modifications to the basic Ethernet frame structure have been proposed to extend Ethernet's addressing capability, e.g., Q-in-Q, Mac-in-Mac, Virtual MAN and Ethernet-over-MPLS
- Standardization bodies favor concepts (such as Q-in-Q and VMAN) that are backward compatible with the legacy Ethernet frame
- Signaling solutions still need further development